



- Cast iron heat exchanger and stainless steel burners
- Integral fan for sidewall venting
- Six sizes available in natural or LP gas
- Limited lifetime warranty
- LWCO standard equipment
- Optional direct vent kit available
- Boiler easily field convertible to left side piping

See back side for piping configuration.

## BALI 2® Gas-Fired Hot Water Boiler

Designed for reliability, efficiency and performance. For residential and small commercial applications with approved chimney.




## INTEGRATED BOILER CONTROL

- Located inside the jacket and easily accessible from front of boiler.
- Temperature control, relay, and ignition functions in a single module.
- Includes additional circulator output for a second zone or an indirect water heater like the Mega-Stor II.

Quality  
Value &  
Service

# BWF SERIES - BALI 2®

## TECHNICAL SPECIFICATIONS

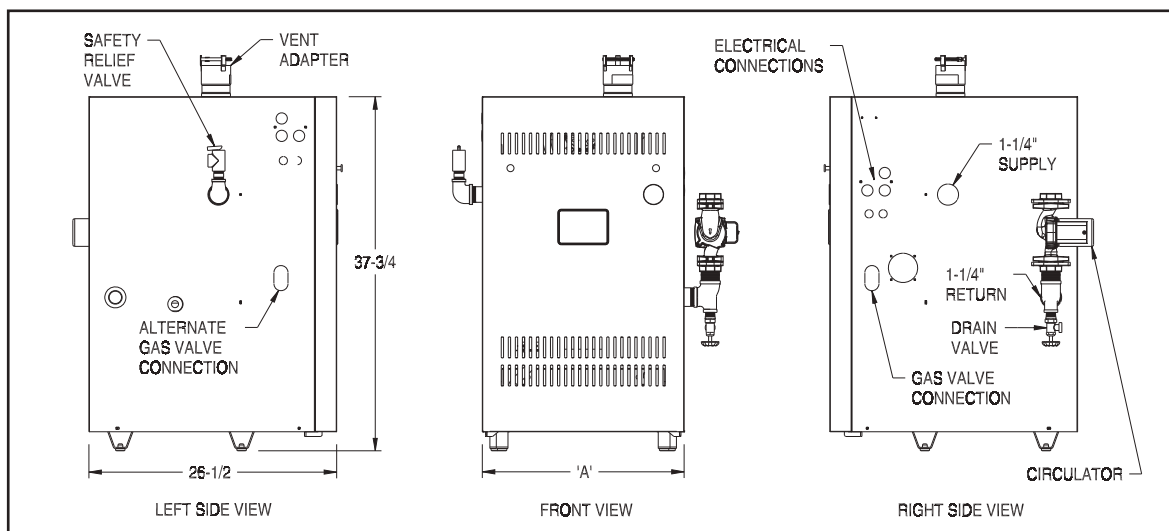

BWF Space Heating Ratings						# of Sections	'A' Width	Connection Size		Water Content	Approx. Shipping Weight	Optional Direct Vent Kit <sup>(3)</sup>
Basic Boiler Model	Fuel	Input <sup>(1)</sup>	Heating Capacity	Net AHRI Rating, Water <sup>(2)</sup>	AFUE			Gas	Vent			
		MBH	MBH	MBH	%			(NPT)	(inch)			
BWF070BN	NAT. GAS	70	60	52	85.0	3	12-3/4	1/2	3	2	260	110019-03
BWF105BN	NAT. GAS	105	90	78	85.0	4	15-1/2	1/2	3	3	310	110019-04
BWF140BN	NAT. GAS	140	120	104	85.0	5	18-1/2	1/2	3	4	360	110019-05
BWF175BN	NAT. GAS	175	150	130	85.0	6	21-1/2	1/2	3	5	415	110019-06
BWF210BN	NAT. GAS	210	179	156	85.0	7	24-3/4	3/4	3	6	470	110019-07
BWF245BN	NAT. GAS	245	208	181	84.0	8	27-3/4	3/4	4	7	525	110019-08
BWF063BL	PROPANE	63	54	47	85.0	3	12-3/4	1/2	3	2	260	110019-03
BWF094BL	PROPANE	94.5	81	70	85.0	4	15-1/2	1/2	3	3	310	110019-04
BWF126BL	PROPANE	126	108	94	85.0	5	18-1/2	1/2	3	4	360	110019-05
BWF157BL	PROPANE	157.5	135	117	85.0	6	21-1/2	1/2	3	5	415	110019-06
BWF189BL	PROPANE	189	161	140	85.0	7	24-3/4	3/4	3	6	470	110019-07
BWF220BL	PROPANE	220.5	187	163	84.0	8	27-3/4	3/4	4	7	525	110019-08

<sup>(1)</sup> Input ratings can be used for elevations up to 2000 ft above sea level. Refer to Appendix B in the installation manual for elevations 2000 ft. or higher. <sup>(2)</sup> Net AHRI Water Ratings shown are based on a piping and pickup allowance of 1.15. Consult manufacturer before selecting boiler for installations having unusual piping and pickup requirements, such as intermittent system operation, extensive piping systems, etc. <sup>(3)</sup> Direct Vent kit is included with high altitude models.

All residential cast iron boiler models include a full one-year warranty. A limited lifetime warranty is provided for the heat exchanger. A 5-year and a 10-year extended warranty covering parts and labor are also available. Visit [VelocityBoilerWorks.com](http://VelocityBoilerWorks.com) or see your warranty for complete details.



The Mega-Stor II® indirect water heater utilizes the energy created by your boiler to produce abundant hot water for your home. Mega-Stor II water heaters come in a variety of sizes from 26 to 119 gallons to meet a variety of residential and commercial needs. A Horizontal model is also available in 40 and 53 gallon sizes.

### ADDITIONAL FEATURES/BENEFITS

- Gas valve and all controls mounted inside the jacket
- Temperature/pressure gauge and drain valve included
- Reliable Honeywell controls
- Designed for installation on combustible floors



Specifications are subject to change

[VelocityBoilerWorks.com](http://VelocityBoilerWorks.com) | Philadelphia PA

BWF2-02/20  
PN 980527